

INSTRUCTION SHEET

for: *Part No. 3061 & 3062*




Normally Open Relay, 4 Pin For Heavy-Duty Applications

Part No. 3061 – 12V, 100 Amp continuous (180A* peak current)

Part No. 3062 – 24V, 60 Amp continuous (80A* peak current)

Terminal Designation

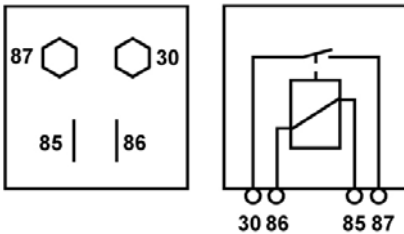

Pin No.	Designation	Description
Pin 30	Contacts	Battery Positive
Pin 85	Coil	Earth
Pin 86	Coil	Switched Input
Pin 87	Contacts Normally Open	Output (to consumer e.g. Driving Lamps)

*Maximum intermittent use only.

Hella Australia Pty Ltd

A.C.N. 006 256 524

P.O. Box 89, Mentone. 3194

Telephone: (03) 9581 9333

Facsimile: (03) 9583 1838

911-355-04